


Time: 3 hours

Full Marks: 100

PART-I(Full Marks-50)
 Use Separate answer sheet for each part.

<p>CO1 [10]</p>	<p>[1] <u>Answer any one from (a) & (b) in this block:</u> (a) Show that the deflection of a fixed beam subjected to a UDL is 1/5 times of deflection of Simply supported beam subjected to a same kind of loading. [10] (b) Show that the deflection of a fixed beam subjected to a point load is 1/4 times of deflection of Simply supported beam subjected to a same kind of loading. [10]</p>
<p>CO2 [15]</p>	<p>[2] Answer (a), (b) in this block (a) Find the slope & deflection of the continuous beam ABCD as shown in figure. Assume any other data if required. Apply conjugate beam method. $AB=I, BC=1.5I, CD=2I$ [10]</p> <div data-bbox="351 761 1149 907" data-label="Diagram"> </div> <p>(b) What do you mean by conjugate beam? Write the assumptions of conjugate beam. [5]</p>
<p>CO3 [15]</p>	<p>[3] <u>Answer any one from (a), (b) in this block:</u> (a) Determine the vertical downward deflection at point E of the truss as shown in figure. The cross sectional area of $AB=BC=CD=2500\text{mm}^2$ and $AE=ED=3000\text{mm}^2$. $BE=CE=5000\text{mm}^2$. Take $E=2.1 \times 10^5 \text{N/mm}^2$. [15]</p> <div data-bbox="606 1187 1260 1556" data-label="Diagram"> </div> <p>(b) Find the vertical deflection at point B of the truss as shown in figure. The cross sectional area of all $AD=BE=CF=5000\text{mm}^2$ and $DE=EF=AB=BC=6000\text{mm}^2$. $BD=BF=4000\text{mm}^2$. Take $E=2 \times 10^5 \text{N/mm}^2$. [15]</p> <div data-bbox="462 1635 989 1892" data-label="Diagram"> </div>

[Turn over

CO4 [10]	<p>3. Answer any one from (a), (b) in this block</p> <p>(a) Draw the SFD & BMD of the continuous beam as shown in figure. Use Three moments equations. $AB=20\text{KN/m}$, $BC= 15 \text{ KN/m}$, $CD= 10 \text{ KN/m}$. [15],</p>  <p>(b) State & explain the claypeyrons three moments theorem. [15]</p>
-------------	---

CO1: Explain and discuss deflection of beams, Columns and Struts & Solve Area-moment theorems, Classify and solve problems regarding Fixed and Continuous beams(K2)

CO2: Solve Conjugate beam theorems and statically determinate and indeterminate structures, supports and reactions (K2)

CO3: Apply Unit load Method to calculate the deflection of Trusses (K3)

CO4: Explain & Solve Theorem of three moments structural systems. (K2)

CO5: Analyse Columns and Struts in terms of buckling by Euler's theorem, Rankine's formulae, Columns with eccentric load, Bi-axial bending(K4)

BE SECOND SEMESTER SECOND YEAR (CONSTRUCTION) EXAMINATION - 2023

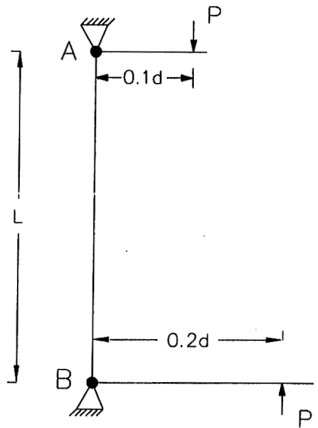
Subject : **THEORY OF STRUCTURES - I**

Time: 3 hours

PART II (50 Marks)

Full Marks: 100

Answer questions as well as parts together & **SERIALLY**. Different parts of the same question should be answered together. Answer question No. 1 & any two from Block '2' in pairs. Choice should be in pairs, either (a)(i) & (ii) OR (b)(i) & (ii) should be answered. Please start answering a **NEW** question or part thereof from a new page for the sake of precision & brevity.

1.	<p>[1] Explain a Beam-Column. [CO1] Prove that for a beam column with an axial load P at each of the pin jointed ends, the expression for bending moment at mid span is $[M]_{x=L/2} = wL^2/8 [1 + 1.03(P/P_E) + 1.04(P/P_E)^2 + \dots]$ OR $= wL^2/8$ when P is such that $P/P_E \leq 1/10$ where w = transverse load per unit run along the beam span, P_E = Euler critical load & L is the effective span of the beam column.</p> <p style="text-align: right;">[3 + 15]</p>	CO1 & CO5 [18]
2.	<p>[2] Answer any one (1) from (a) & (b) in this block [CO5]:</p> <p>(a)(i) Determine the ratio of Buckling Strength of two columns of circular cross sections one hollow & other solid when both are made of the same material, have the same length & cross section area & same end conditions. The internal diameter of the hollow column is half of its external diameter. 16</p> <p>(ii) A column AB of a diameter 'd' is hinged at ends carrying two equal & opposite loads P each at eccentricities as in the figure. Assuming end moments to be applied at the points of support find the condition of the occurrence of the maximum bending moment at a distance 'x' from A in the column. 16</p> <div style="text-align: center;">  </div> <p>(b) (i) Determine the expression of maximum compressive & tensile stress of a slim long column with initial curvature in the plane of the least radius of gyration, subjected to axial load P with effective length l. Determine the experimental analysis as pronounced by Southwell in the case of this column. 16</p> <p>(ii) A hollow tube 4.0 M long with external & internal diameter 40 mm & 25 mm respectively was found to extend 4.8 mm under a tensile load of 60 kN. Find the buckling load for the tube with both ends pinned. Also, find the safe load on the tube taking FOS as 5.0 16</p>	CO5 [32]